




\* ISO-Certificate applies only to E.E.P.D. GmbH

7"7" mobile solution

7"7" mobile solution

### EXTERNAL INTERFACES

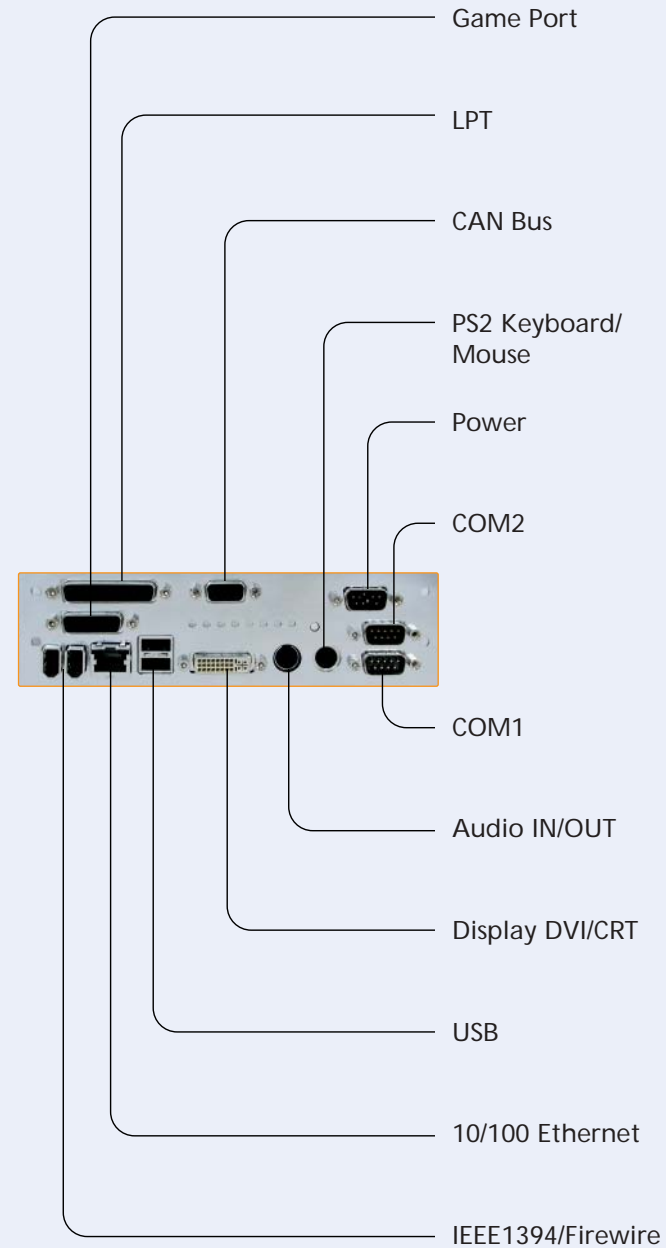

The Information contained in this document has been carefully checked and is believed to be reliable. However, E.E.P.D. GmbH makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of what ever nature resulting from the use of, or reliancy upon, it.

E.E.P.D. does not guarantee that the use of any information contained herein will not infringe upon the patent, trademark, copyright or other rights of third parties, and no patent or other license is implied hereby.

This document does not in any way extend E.E.P.D.'s warranty on any product beyond that set forth in its standard terms and conditions of sale. E.E.P.D. reserves the right to make changes in the products or specifications, or both, presented in this publication at any time and without notice.

E.E.P.D.'s products are intended to be used by professionals only.

#### LIFE SUPPORT APPLICATIONS

E.E.P.D.'s products are not intended for use as critical components in life support appliances, devices or systems in which the failure of a E.E.P.D. product to perform could be expected to result in personal injury. All mentioned trademarks are registered trademarks of their owner.

Copyright  
2001/2002 by E.E.P.D. GmbH. All rights reserved.18.02.2002



**E.E.P.D.**  
Tomorrow's Technology Today

Gewerbering 3  
D-85258 Weichs · Germany  
Tel. ++49-8136-9328-0  
Fax ++49-8136-9328-66

EEPD North America, Inc.  
1560 Sawgrass Corporate Parkway  
Sunrise, FL 33323  
Tel 954-331-4661  
Fax 954-331-4572

www.eepd.com

w w w . e e p d . c o m



e.n.v.a.d.e.r



Patent pending

SYSTEMS SPECIFICATIONS

- Processor: Intel® 300 MHz Celeron™ - other Processors optional
- Max. 256MB PC-100 SO-DIMM memory
- Graphic: up to 1024x768 on LCD via DVI or 1280x1024 on CRT
- PS/2 Mouse and Keyboard interface
- Parallel Port EPP/ECP compatible
- 2x Serial ports RS-232
- 2x USB ports
- 1x Game port
- AC97 compatible Sound with 1x stereo line out, 1x stereo line in, 1x mic. in
- 1x 10/100MBit Ethernet
- 2x IEEE1394/Firewire interface
- Compact Flash-Disk up to 1GB
- Ext. Firewire HDD optional
- 1x EIDE DVD-Rom 8x
- CAN-Bus interface optional
- Watchdog
- Temperature control and management
- Operating Systems:  
Windows Embedded XP - other Operating systems upon request
- Power Input 9-36V DC / 15-30W depending on configuration / low standby power consumption
- Intelligent power supply with undervoltage battery protection
- Size: 180 x 50 x 170 mm (DIN CAR RADIO SLOT compatible)
- Operating temperature: -5°C to +55°C or optional -20°C to +85°C
- Storage temperature: -40°C to +95°C

## DISPLAY SPECIFICATIONS

### Display Option 1

- 800 x 600 / 8,4" (-5°C to +55°C)
- Visible Area: 170 x 127 mm
- DVI-Interface
- Integrated USB-Hub
- Touchscreen
- Custom colour and design optional



Size: 220 x 170 x 46 mm | weight: 1100 g

### Display Option 2

- 800 x 480 / 7,5" (-30°C to +85°C)
- Visible Area: 154 x 87 mm
- DVI-Interface
- Integrated USB-Hub
- Touchscreen
- Custom colour and design optional



Size: 207 x 160 x 46 mm | weight: 1000 g

## SOLUTIONS

- Truck Computer (TRUCOMP) with navigation, security cameras and entertainment features
- Complete dashboard information and control system
- Fleet Management
- Multimedia communication device for police and other security service with online picture database
- Municipal vehicles for garbage collection with individual billing
- Security transports with camera surveillance and online communications
- Bus entertainment systems for video, gaming and internet access
- Online vehicle supervision and black box features for accident reporting
- Rescue vehicles with online communication to send pictures directly from the scene to supervisors and hospitals
- Car PC for high end business cars including hands-free phone interface and internet access
- Navigation and control systems for yachts and submarines including unmanned vessels

## mobilesolution

