




Product Brief

Intel® Server System
SR1530CL based on
Intel® Server Board
S5000VCL

The Intel® Server System SR1530CL

A Value Rack-Optimized Integrated Server System Designed for Flexible, High-density Server Solutions

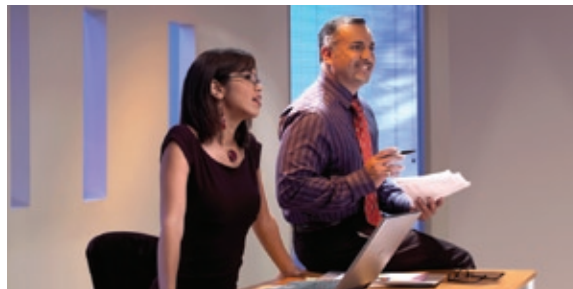

Product Overview

This is Intel's latest enterprise-level, rack-optimized value system level solution where processing power, reliable memory infrastructure, and redundant networking are required elements for entry level server infrastructures.

Designed for entry level system infrastructures, this value rack-optimized 1U system from Intel provides the feature set needed for web-hosting, HPC applications and other high-transactional applications at an affordable price point. With flexible storage solutions supporting up to two fixed 3.5" SATA drives and optional slim-line CD or DVD drives,

this integrated system is ideal for space-constrained environments such as web farms, clusters and appliance designs that can take advantage of this unique shorter chassis length.

The Intel® Server System SR1530CL includes the Intel® Server Essentials CD pack, a suite of software applications that are designed to help reduce the complexity of deploying and managing Intel Server Systems. The Intel® Server Essentials CD pack is comprised of Intel® Deployment Assistant, a graphical tool aimed at simplifying the process of deploying an Intel server, and Intel® System Management Software, a comprehensive software suite designed to provide local and remote server management functionality for businesses of all sizes. This integrated system is also designed for increased uptime and tool-less service-ability. Over 10,000+ hours of testing and validation were done, not only with other building blocks from Intel, but also with third party peripherals and memory to assure compatibility and reliability.





System Specifications



System

Components Included

Intel® Server System SR1530CL

- Intel® Server Board S5000VCL
- Intel® Server Chassis SR1530
- One riser card supporting 2 PCI slots (LP PCI-E x8 and FH/ML PCI-X 133)
- Pre-routed cables
- 400-watt fixed power supply
- Two fixed 3.5" hard drives
- System fans
- Air duct and baffle
- Slim-line CDROM Bay
- Documentation

HDD Interface

SR1530CL: fixed SATA

Number of Processor Sockets

2

Processor Support¹

Multi-core Intel® Xeon® processor

System Bus Speed

1066 MHz and 1333 MHz

Chipset

Intel® Chipset 5000V

PCI Buses

4

Total Slots

2

Slot Types

FH/ML PCI-X 133

Memory Capacity

12GB ECC Fully Buffered DDR2 (6 DIMMs)

Integrated LAN

2 x Intel® PRO/1000 EB Ethernet connections with Intel® I/O Acceleration Technology (Intel® I/OAT)

Integrated Graphics

ATI* with 16MB memory

Server Management Support

Intel® System Management Software

Form Factor

1U Rack

Drive Bays

2 x 3.5" fixed SATA
Optional slim-line Optical Drive

System Cooling

Two fixed cooling blowers with ducting and a PCI fan

Power Supply

400-watt, non-redundant PFC

Dimensions (H x W x D)

1.703" x 16.93" x 20.00"

Features and Benefits

Balanced server platforms based on dual-core Intel® Xeon® Processors offer the following:

- **Dual-core processing** multiplies server performance by doubling processing ability on a single chip, without increasing power consumption.
- **Dual independent bus architecture** enables dedicated data flow to each processor, maximizing system performance.
- **Fully buffered DIMM memory** increases capacity and memory bandwidth to keep pace with the processor and I/O performance enhancements.
- **Intel® Extended Memory 64 Technology²** extends the amount of available server memory.
- **Intel® I/O Acceleration Technology (Intel® I/OAT)** is a platform innovation that helps get network data to and from server applications faster, while consuming far fewer CPU cycles.
- **Intel® Virtualization Technology³** turns a physical server into multiple systems (virtual machines) allowing multiple operating systems and applications to run inside a single platform.
- **Execute Disable Bit⁴** reduces exposure to viruses and prevents harmful software from executing on the server or network.
- **Enhanced Intel SpeedStep® Technology** allows processors to adjust operating speeds to meet varying performance needs, while balancing power consumption.



Optional Accessories and Spare Parts:

| Intel Building Block | Product Name(s) | Order Code(s) |
|----------------------|-------------------------------------|--|
| Optional Drives | Slim-line CD drive | AXXSCD |
| | Slim-line DVD ROM | AXXVCDROM |
| Rack Options | Tool-less Rail Cable Management Arm | AXXHERAIL |
| | Fixed Mount Bracket Basic Rail Kit | AXXRACKCARM |
| Intel® RAID Options | Intel® RAID Controller Modules | SRCSAS18E SRCSAS144E |
| | Chassis Spares | Spare 400W Power Supply Fixed Product Maintenance Kit Blower/Fan Kit |

Technical Specifications

System Memory

Capacity

Six Fully Buffered DIMM sockets for up to 12 GB of registered ECC DDR2 667 memory.

Reliability Features

Corrects single-bit errors, detects double-bit errors (using ECC memory), and supports Intel® x4 Single Device Data Correction (Intel® x4 SDDC), memory mirroring, memory sparing

Intel® Server Management

Integrated Management Type

IPMI 2.0-compliant onboard platform instrumentation

Software Support

Intel® System Management Software
Intel® Deployment Assistant

Supported Operating Systems

Microsoft® Windows® Server 2003 Enterprise Edition, Microsoft Windows 2000 Advanced Server, Red Hat® Linux® Enterprise 4.0, SuSE Linux® Enterprise Server and Novell® NetWare® 6.5

System BIOS

Type

8Mb Flash EEPROM with EFI* BIOS, Multiboot BBS (BIOS Boot Specification) 1.4-compliant

Special Features

Plug and play, IDE drive autoconfigure, SMBIOS 2.3, ECC/parity support, multilingual support, enabled for rolling/online BIOS updates

Jumpers

CMOS clear, password clear, BIOS bank select, BMC boot block write protect, serial port B select

Mechanical

Board Style

CEB (Compact Electronics Bay)

Board Size

10.5" x 12" (266.7 mm x 304.7 mm)

Environment

Ambient Temperature

Operating (system): +10°C to +35°C
non-operating/storage (system): -40°C to +70°C ambient

Relative Humidity

Non-operating: 95%, non-condensing at +30°C

Safety and EMC Regulatory Compliance (Class A)

(EMC Regulatory Compliance is based on a board configured in an Intel host system in which Intel tested the board and found it compliant.) RoHS (Restriction of Hazardous Substances) compliant with server exemption.

| Region | Certification Safety and/or EMC | Regulatory Mark Safety and/or EMC |
|-----------------------------------|------------------------------------|--------------------------------------|
| Australia/ New Zealand | ACA, MED | C-Tick |
| Canada | UL/Industry Canada | cURus/ICES |
| Europe | European Directives | CE |
| Germany | GS | GS |
| International | CB Report / CISPR | No legal requirements |
| Japan | VCCI (Verification only) | No legal requirements |
| Korea | RRL | MIC |
| Taiwan | BSMI DOC | BSMI |
| United States | UL / FCC (Verification only) | cURus |



CANADA ICES-003 CLASS A

To build your system and get more details on server configurations from Intel visit: www.intel.com/go/serverconfigurator

For more details on the Intel® Server System SR1530CL please see: support.intel.com/support/motherboards/server/s5000VCL

For more information on how to make the Intel® Server System SR1530CL part of your server environment, please contact an Intel® Channel Partner Program participant.

¹ Refer to support.intel.com/support/motherboards/server for up-to-date details on processors supported by each server board.

² Intel® EM64T requires a computer system with a processor, chipset, BIOS, operating system, device drivers and applications enabled for Intel® EM64T. Processor will not operate (including 32-bit operation) without an Intel® EM64T-enabled BIOS. Performance will vary depending on your hardware and software configurations. See www.intel.com/info/em64t for more information including details on which processors support Intel® EM64T or consult with your system vendor for more information.

³ Intel® Virtualization Technology requires a computer system with an enabled Intel® processor, BIOS, virtual machine monitor (VMM) and for some uses, certain platform software enabled for it. Functionality, performance or other benefits will vary depending on hardware and software configurations. Intel Virtualization Technology-enabled BIOS and VMM applications are currently in development.

⁴ Enabling Execute Disable Bit functionality requires a PC with a processor with Execute Disable Bit capability and a supporting operating system. Check with your PC manufacturer on whether your system delivers Execute Disable Bit functionality.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO SALE AND/OR USE OF INTEL PRODUCTS, INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT.

Intel, the Intel logo, Intel. Leap ahead., the Intel. Leap ahead. logo, Xeon, and Intel SpeedStep are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

*Other names and brands may be claimed as the property of others.

